

# Escape Ex2

Emergency LED Lighting fixture for zone 2/21



The Escape Ex2 series lighting fixtures are specifically designed for use in potentially explosive areas, certified for ATEX Zone 2/21 hazardous environments. High quality LED components guarantee exceptional efficiency up to 159 lm/W and extremely long lifetime of more than 100,000 hours even at elevated temperatures.

Their IP66/IP67 and IK08 protection ratings guarantee reliable performance even in the harshest industrial conditions. The lightweight yet robust body, made of UV-stable polycarbonate (RAL 7035), ensures long-term durability without degradation from environmental factors. The opal polycarbonate cover provides effective light diffusion while maintaining high impact resistance, further enhancing their operational reliability. These fixtures offer versatile mounting solutions and feature innovative emergency function control that enables safe operation without opening the luminaire in hazardous areas.

- High efficiency with 100,000+ hour lifetime at L90B50 Ta@ 25 °C
- ATEX / IECEx certification ZONE 2/21
- Compact design with robust IK08 housing
- Made in Europe
- Wide temperature range: -30 °C to +60°C



**Reference standards**

Directive 2014/34/EU	
ATEX Ex protection type	⊕ II 3G Ex nR IIC T6 Gc ⊕ II 2D Ex tb IIIC T85°C Db
ATEX certificate number	<i>pending</i>
Rules of compliance	EN/IEC 60079-0: 2017 EN/IEC 60079-15: 2017 EN/IEC 60079-31: 2022
IECEX Ex protection type	Ex nR IIC T6 Gc Ex tb IIIC T85°C Db
IECEX certificate number	<i>pending</i>
Ingress protection	IP66 / IP67
Impact Protection	IK08
Temperature range	-30 °C to +60 °C

**Electrical characteristics**

Power supply	EP – electronic - 220–240 V, 50/60 Hz
Lamp source	LED 4000K, CRI +80 Lifetime: > 100.000 hours L80B50 Ta@ 50/60 °C > 100.000 hours L90B50 Ta@ 25 °C
Connection	Polyamid cable gland M20x1,5mm (6-12 mm diameter)
Terminals	Screwless terminal block, max. wire cross-section 4 mm <sup>2</sup>
Emergency unit	emergency unit composed of inverter charger and Ni-Cd battery pack, autonomy 180 min

**Technical data**

Order number	Lighting fixture luminous flux [lm]	Power input [W]	Rated power output [lm/W]	Version*	Emergency unit autonomy / output	Temperature range [°C]	Weight [kg]
ESCZ260ND070PS665FE	1086	7.00	149	NO	-	-30 °C to +60 °C	2.33
ESCZ255ND130PS665FE	2148	13.00	159	NO	-	-30 °C to +55 °C	2.33
ESCZ250ND200PS665FE	3189	20.00	145	NO	-	-30 °C to +50 °C	2.73
ESCZ255ND130PS465FE	2148	13.00	159	ND	-	-30 °C to +55°C	2.35
ESCZ240EN070PS465FE	1086	7.00	110	EN	180 min / 438 lm	0 °C to +40 °C	2.73
ESCZ240EN130PS465FE	2148	13.00	129	EN	180 min / 438 lm	0 °C to +40 °C	2.73
ESCZ240EA070PS465FE	1086	7.00	110	EA	180 min / 438 lm	0 °C to +40 °C	2.73
ESCZ240EA130PS465FE	2148	13.00	129	EA	180 min / 438 lm	0 °C to +40 °C	2.73
ESCZ240ED130PS465FE	2148	13.00	129	ED	180 min / 438 lm	0 °C to +40 °C	2.75
ESCZ249E0025PS465FE	438	2.50	175	E0	180 min / 438 lm	0 °C to +45 °C	2.56
ESCZ249D0025PS465FE	438	2.50	175	D0	180 min / 438 lm	0 °C to +45 °C	2.58
ESCZ260CB050PS465FE	815	5.00	163	CB	90 min / 815 lm	-30 °C to +60 °C	2.33

**Legend for type of luminaire**

NO	normal version
ND	normal version with DALI2 driver
EA	maintained emergency version with 3h autonomy and battery autotest function
ED	maintained emergency version with 3h autonomy, DALI inverter and DALI2 driver
D0	non-maintained emergency version with 3h autonomy and DALI inverter
EN	maintained emergency version with 3h autonomy
E0	non-maintained emergency version with 3h autonomy
CB	suitable for central battery system

**Mechanical characteristics**

Body	Plastic material PC (polycarbonate), colour grey RAL 7035
Gasket	Silicon
Cover	PC (polycarbonate) opal
Fastening	Direct fixing to the ceiling or wall of the illuminated space by means of two self-locking clips (standard equipment), self-locking cable suspension on two clips, cable suspension by means of suspension lugs.
Protective cage	Painted iron

**Installation**

hazardous areas - Zone 2 (Gases) - Zone 21 (Dusts)

**Classification**


Group II - Category 3G 2D

**Available on request**


– 3000 K / 5000 K / 6500 K - color temperature

Reference details

**Standard equipment →**

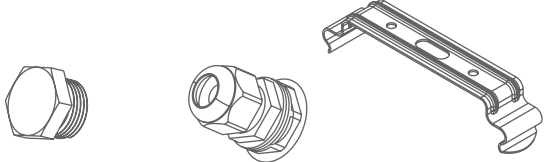


2x cable plug M20      2x cable gland M20      2x mounting clip

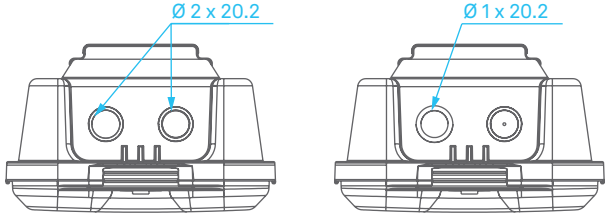

Ø 2 x 20.2      Ø 1 x 20.2

The luminaire is normally equipped with 3x openings with a diameter of 20.2 mm. The wall thickness of the luminaire is 2.5 mm.

**Dimensions in mm →**

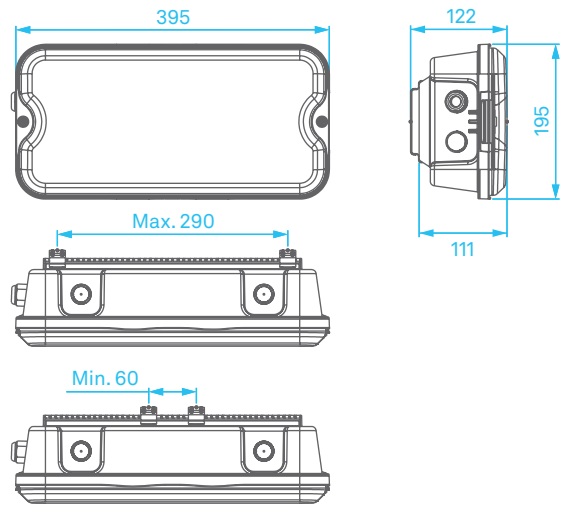

395      122      195

Max. 290

Min. 60

**Pictograms →**  
Emergency version includes all 5 pictograms in package by standard



ESCACP100


ESCACP200

ESCACP300

ESCACP400

ESCACP500

**Available on request →**

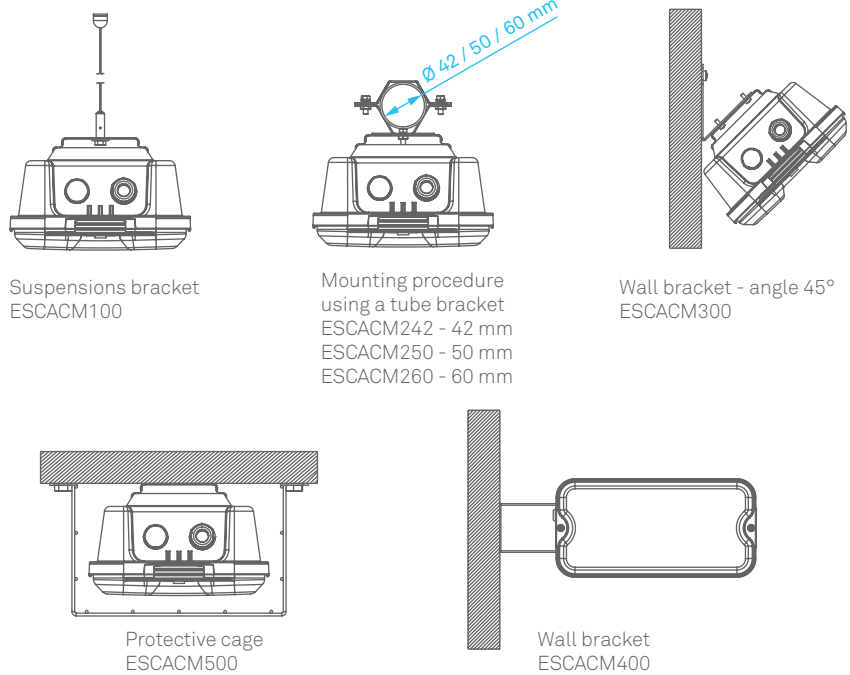

Suspensions bracket  
ESCACM100




Mounting procedure  
using a tube bracket  
ESCACM242 - 42 mm  
ESCACM250 - 50 mm  
ESCACM260 - 60 mm

Wall bracket - angle 45°  
ESCACM300

Protective cage  
ESCACM500

Wall bracket  
ESCACM400

Polar diagrams – photometric data

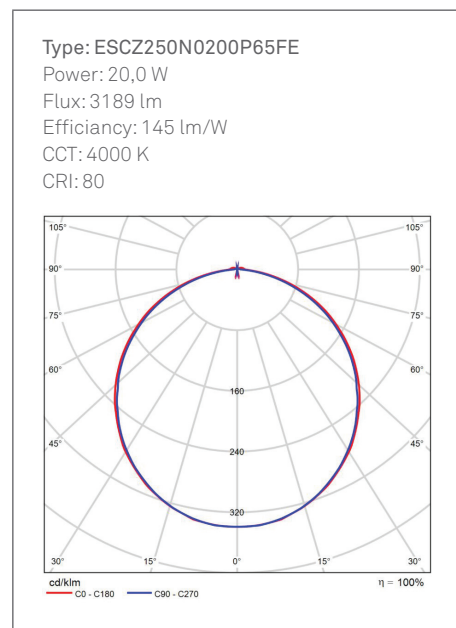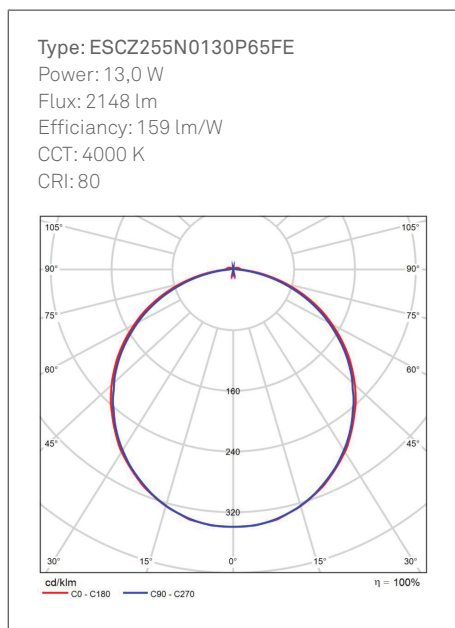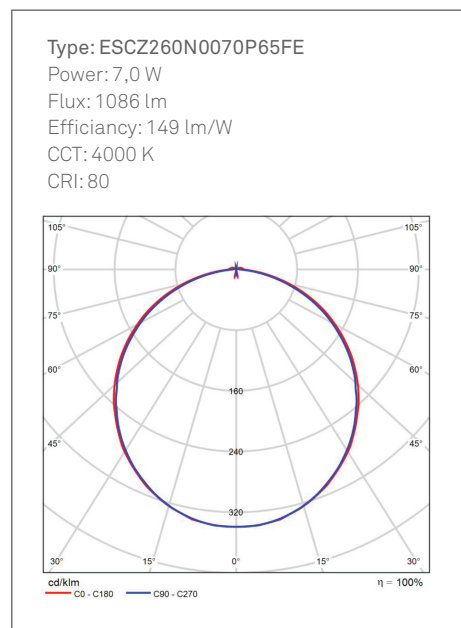

REMARK:  
 Due to the development of the national and international specifications and of the technology, the above technical characteristics showed on this bulletin can be considered as binding on our confirmation only.